


**JACKIE**

Enzo Panzeri 2015



Ceiling or wall lighting fixture for interiors, with swivelling light beam.  
 Pickled sheet metal ceiling/wall bracket in polyacrylic paint.  
 Die-cast aluminium wall plate in polyacrylic paint.  
 Die-cast aluminium structure in matt white, black, red or titanium polyacrylic paint.  
 Die-cast aluminium head rotating on two axes in polyacrylic paint.  
 Acrylic diffuser with double serigraphy.

AS AWARDED BY  
 THE CHICAGO  
 ATHENAEUM:  
 MUSEUM OF  
 ARCHITECTURE  
 AND DESIGN.



GERMAN  
 DESIGN  
 AWARD  
 SPECIAL  
 2016



DESIGN  
 AWARD  
 2016




Finalista Delta  
 Premios ADI  
 2016

## TECHNICAL DATA




Code	P07701.000.0101
System power consumption	9W
Efficacy	78lm/W
Light source	LED
Light source lifetime	L90 (B10) 50000h
Colour temperature	3000K Ra >80
Light distribution	adjustable
Apertura fascio	90°
Power supply	220-240V AC
Frequency	50/60Hz
Electrical configuration	ON-OFF
Driver	integrated included
Nominal luminous flux	800lm
Lumen output	702lm
Efficiency	87.750%
Weight	0,4780Kg
Protection degree	IP40
Colour tolerances	SDCM3
Packing dimensions (cm)	15 x 25 x 15

## POLAR DIAGRAM

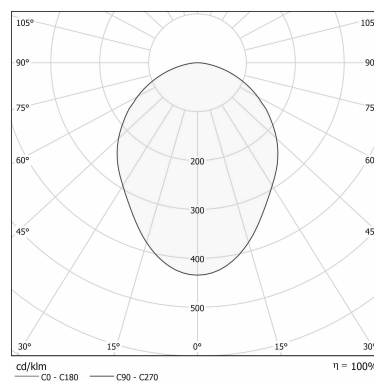

## TECHNICAL DRAWING



## COLOUR

matt white

